

+ Datasheet EE850

CO₂ and Temperature Sensor
for Duct Mounting



EE850

CO₂ and Temperature Sensor for Duct Mounting

The EE850 combines CO₂ and temperature (T) measurement in an innovative enclosure. It is ideal for demand controlled ventilation and building automation. With a CO₂ measuring range of up to 10 000 ppm and a T working range of -20...+60 °C (-4...+140 °F), the EE850 can be employed also in demanding climate and process control applications.

Long-Term Stability

The EE850 incorporates the E+E dual wavelength NDIR CO₂ sensor, which compensates for ageing effects, is highly insensitive to pollution and offers outstanding long term stability.

High Measurement Accuracy

A multiple point CO₂ and T factory adjustment procedure leads to excellent CO₂ measurement accuracy over the entire T working range.

Functional Design

Installed into a duct, a small amount of air flows through the divided probe to the CO₂ sensing cell located inside the sensor enclosure and back into the duct. The T sensing element is placed inside the probe. The functional enclosure facilitates easy and fast mounting of the sensor with closed cover.

Analogue, Digital and Passive T Outputs

The CO₂ and T measured data is available on analogue outputs. Additionally, the RS485 interface supplies all values via Modbus RTU protocol.


Easy Configuration and Adjustment

An optional stick and the free PCS10 Product Configuration Software facilitate the configuration and adjustment of the EE850.



EE850 duct mount

Features


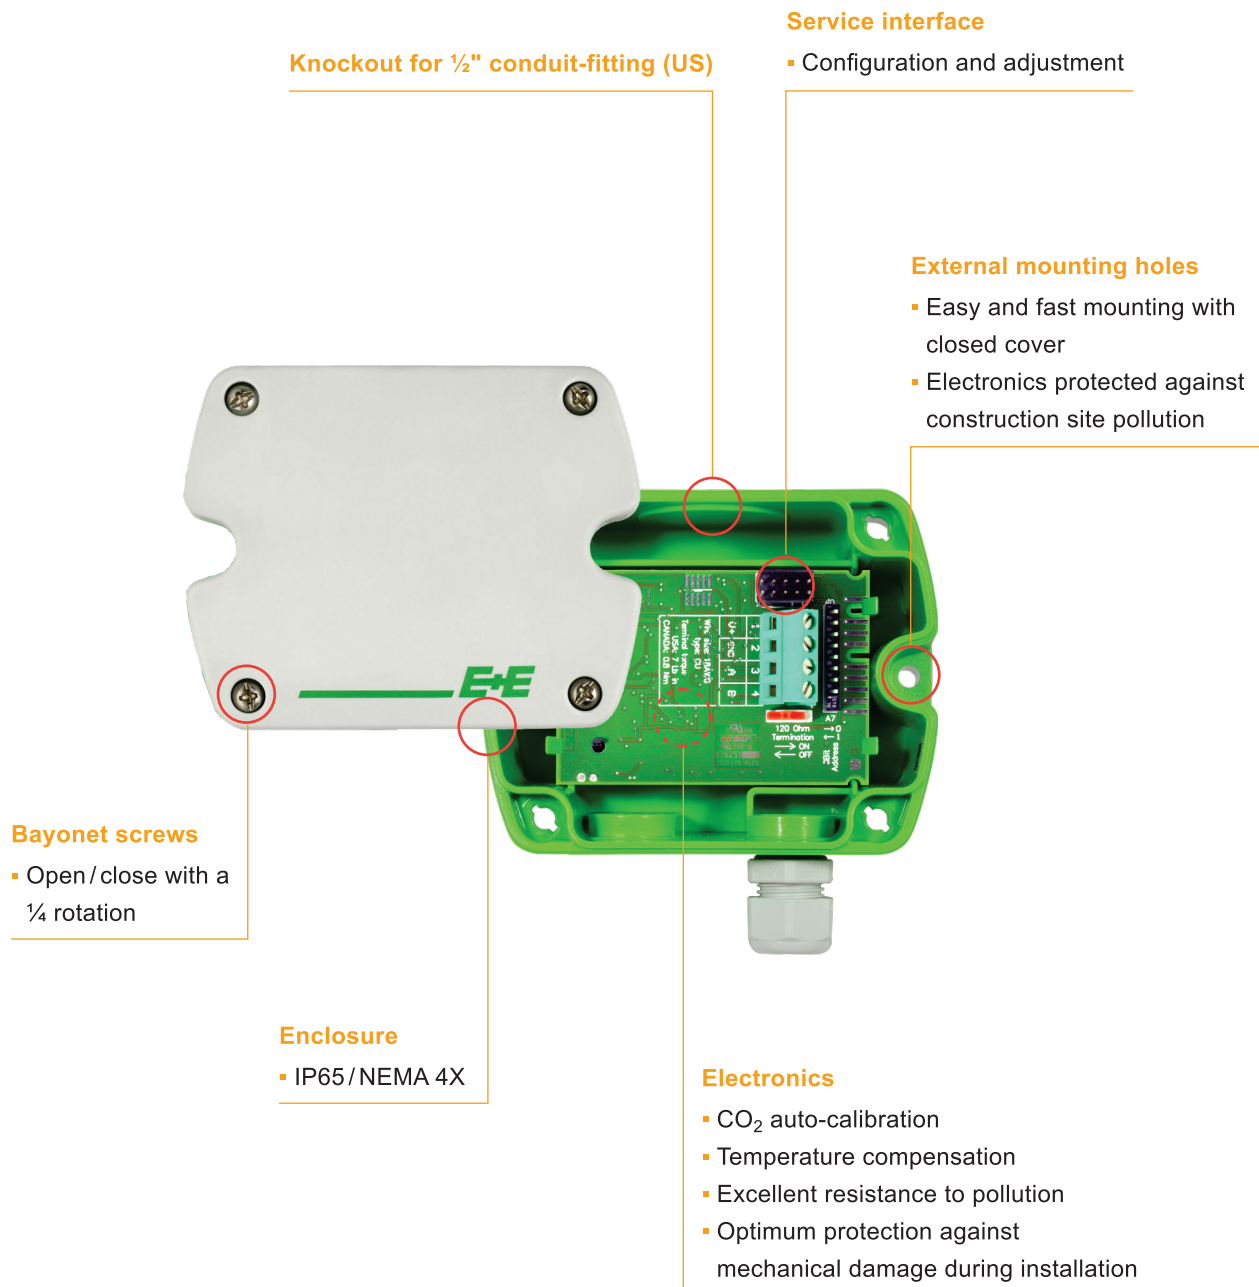


Test report

According to DIN EN 10204-2.2


Dimensions

Values in mm (inch)

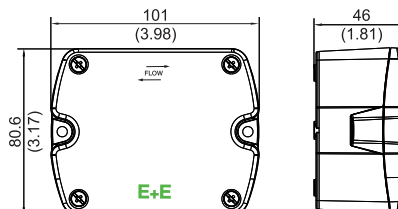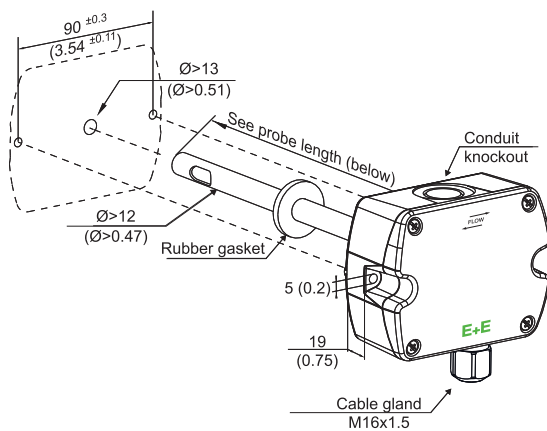


Mounting flange

(Included in the scope of supply)

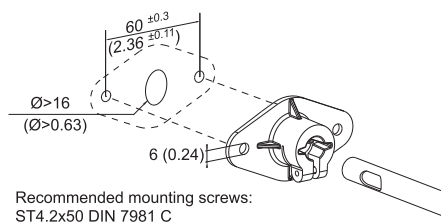


Probe length

L200:

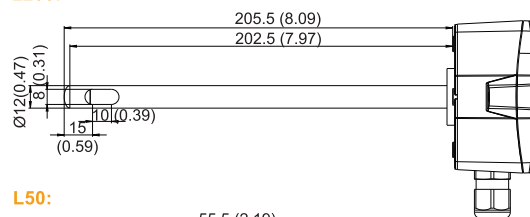

L50:



Technical Data

Measurands

CO₂

Measurement principle	Dual wavelength non-dispersive infrared technology (NDIR)
Measuring range	0...2 000 / 10 000 ppm
Accuracy @ 25 °C (77 °F) and 1013 mbar (14.7 psi) 0...2 000 ppm 0...10 000 ppm	< ±(50 ppm +2 % of measured value) < ±(100 ppm +5 % of measured value)
Temperature dependency, typ. in the range of -20...+45 °C (-4...+113 °F)	±(1+ CO ₂ concentration [ppm] / 1 000) ppm/°C ± 0.556 * (1+ CO ₂ concentration [ppm] / 1 000) ppm/°F
Response time t ₆₃ , typ.	<100 s at 3 m/s (590 ft/min) air speed in the duct
Measuring interval	Approx. 15 s
Calibration interval Recommended under normal operating conditions in building automation.	>5 years

Temperature (T)

Measuring range	-20...+60 °C (-4...+140 °F)
Accuracy @ 20 °C (68 °F)	±0.3 °C (±0.5 °F)
Response time t ₆₃	<50 s

Outputs

Analogue

T: according to ordering guide	0 - 10 V	-1 mA < I _L < 1 mA	I _L = load current
CO ₂ 0...2 000 / 10 000 ppm	0 - 10 V 4 - 20 mA	-1 mA < I _L < 1 mA R _L < 500 Ω	R _L = load resistance

T sensor passive

2-wire-connection	T sensor type according to order code, see ordering guide
Wire resistance (terminal - sensor), typ.	0.4 Ω

Digital

Digital Interface	RS485 (EE850 = 1/10 unit load)
Protocol	Modbus RTU
Factory settings	Baud rate acc. to order code, parity even, 1 stop bit, Modbus address 67
Supported Baud rates	9 600, 19 200 und 38 400
Measured data types	FLOAT32 and INT16

General

Ordering Guide

- 1) Not with RS485 output (J3) or 50 mm probe length (L50) / T-Sensor details see www.epluse.com/R-T_Characteristics.
- 2) Factory setting: Parity even, 1 stop bit; Modbus Map and communication setting: See User Manual and Modbus Application Note at www.epluse.com/ee850.
- 3) Not with analogue output A3 und A6.

Order Example

EE850-M11HV3J3P1BD6

Feature	Code	Description
Model	M11	CO ₂ + T
CO ₂ measuring range	HV3	0...10 000 ppm
Output	J3	Digital interface RS485
T sensor passive	No code	Without T sensor
Probe length	No code	200 mm (7.87")
Protocol	P1	Modbus RTU
Baud rate	BD6	19 200

EE850-M10HV1A6L50

Feature	Code	Description
Model	M10	CO ₂
CO ₂ measuring range	HV1	0...2 000 ppm
Output	A6	4 - 20 mA
Probe length	L50	50 mm (1.97")

Accessories

For further information see datasheet "[Accessories](#)".

Accessories	Code
USB-C configuration stick	HA011070
E+E Product Configuration Software (Free download: www.epluse.com/pcs10)	PCS10
Power supply adapter	V03

