


+ Datasheet EE07

Interchangeable Humidity and Temperature
Probe with Digital Interface

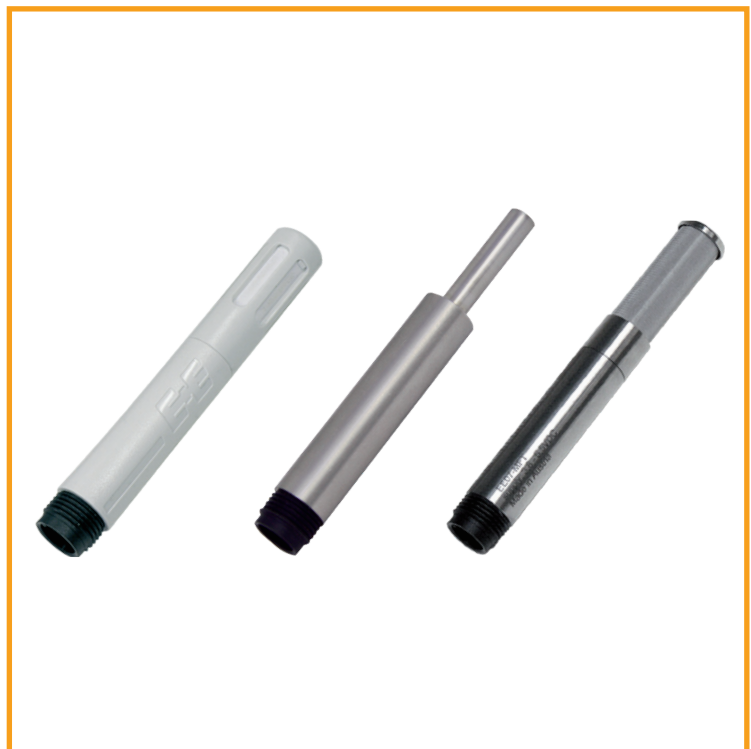

EE07

Interchangeable Humidity and Temperature Probe with Digital Interface

The EE07 is designed for accurate humidity (RH) and temperature (T) measurement in demanding climate control and OEM applications. It is available with polycarbonate or stainless steel enclosure, as well as for T measurement only. Furthermore, it features an optimized version for minimal power consumption, ideal for battery-powered measurement devices.

Measurement Performance

The high-end E+E humidity sensing element, manufactured using state-of-the-art thin film technology, offers outstanding measurement accuracy. With a wide T working range and excellent T compensation, the EE07 is suitable for both indoor and outdoor use. The excellent RH and T accuracy of the probe makes it ideal for use in meteorology with the optional radiation shield.

Long-Term Stability

The E+E proprietary coating in combination with the wide choice of filter caps protects the RH sensing element from corrosion and dirt. This ensures best long-term stability even in harsh environment.

Digital Interface

The measured values are available on the serial E2 interface. The M12 connector allows for EE07 replacement within seconds.

Adjustable

The user can perform the RH and T adjustment of the probe with an optional adapter.



RH/T or T polycarbonate probe with membrane filter



RH/T stainless steel probe with metal-grid filter



T stainless steel probe

Features

Measurement performance

- Outstanding RH and T accuracy
- Measuring range from -40 °C (-40 °F) up to +80 °C (+176 °F)
- Temperature compensation
- Very low power consumption

RH/T probe head

- RH sensing element protected by E+E proprietary coating
- Outstanding long term stability
- Wide choice of filter caps



Output and connection

- E2 interface
- M12x1 connector, 4-poles
- Pluggable and interchangeable
- Adjustable via optional adapter

Mechanical construction

- IP65 protection rating
- Polycarbonate or stainless steel enclosure

Inspection certificate
according to DIN EN 10204-3.1

Features


Protective Sensor Coating

The E+E proprietary sensor coating is a protective layer applied to the active surface of the sensing element. The coating substantially extends sensor lifetime and ensures optimal measurement performance in corrosive environment (salts, off-shore applications). Additionally, it improves the sensors' long term stability in dusty, dirty or oily applications by preventing stray impedance caused by deposits on the active sensor surface.


Dimensions

Values in mm (inch)

EE07-M1Fx

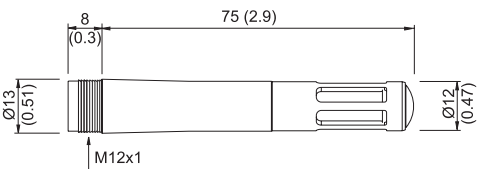


EE07-M1HS2x

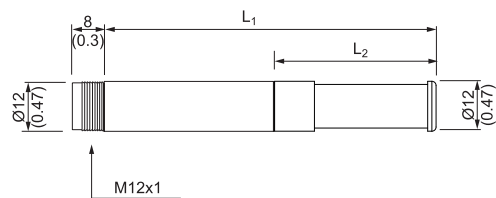

Filter	L ₁	L ₂
Metal grid	79.5 mm (3.13")	38.5 mm (1.52")
H ₂ O ₂	73.5 mm (2.89")	33 mm (1.3")

EE07-M3HS2x

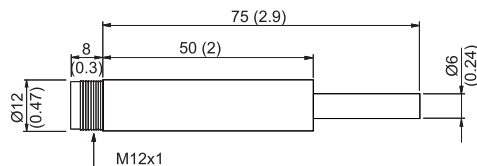


Electrical Connection

WARNING


The manufacturer cannot be held responsible for personal injuries or damage to property as a result of incorrect handling, installation, wiring, power supply and maintenance of the device.

EE07

**M12x1 flange coupling socket with
50 mm (2") free cable ends (HA010705)**



Pin	Description
1	GND
2	V+
3	DATA
4	CLOCK

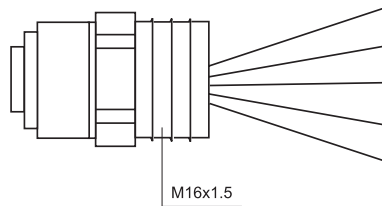

Color	Description
Brown	GND
White	V+
Blue	DATA
Black	CLOCK
Grey	Shielding

Technical Data

Measurands

Relative Humidity (RH)


Measuring range	0...100 %RH, non condensing
Accuracy ¹⁾ (incl. hysteresis, non-linearity and repeatability) @ 23 °C (73 °F)	0...90 %RH ±2 %RH 90...100 %RH ±3 %RH
Temperature dependency	$<(0.025 + 0.0003 \times RH) \times (T - 23 \text{ °C})$ (73 °F)
Supply voltage dependency for option AF4 and V+ < 3.3 V DC, typ.	-0.0026 %RH/mV

1) Traceable to international standards, administrated by NIST, PTB, BEV,...

The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).

The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

Temperature (T)

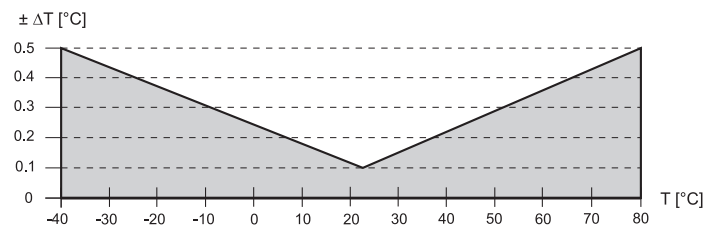Measuring range	-40...+80 °C (-40...+176 °F)
Accuracy	$\pm \Delta T$ [°C] 

Technical Data




Output

Digital

Digital interface	E2 interface ¹⁾
-------------------	----------------------------

1) For further support literature refer to www.epluse.com/ee07.

General

Power supply class III  USA & Canada: Class 2 supply necessary Standard Option AF4	3.8 V DC - 5.5 V DC 2.7 V DC - 5.5 V DC
Current consumption , typ. Standard Option AF4	< 1.5 mA < 6 µA in sleep mode 1.5 - 2.5 mA during measurement (150 ms) Average: <200 µA at sampling rate = 1 s
Voltage level digital interface	Max. 3.5 V DC, ≤V+ for option AF4
Electrical connection	M12x1, 4 poles
Humidity working range With coating Without coating	0...100 %RH, non-condensing 0...95 %RH, non-condensing
Temperature range	-40...80 °C (-40...176 °F)
Storage conditions	-40...80 °C (-40...176 °F) 0...95 %RH, non-condensing
Maximum cable length (Depends on the bus frequency)	30 m (98.4 ft)
Enclosure Material Protection rating, probe body	Polycarbonate or stainless steel IP65
Electromagnetic compatibility ¹⁾	EN 61326-1 EN 61326-2-3 Basic environment FCC Part15 Class B ICES-003 Class B
Conformity	 

1) No protection against surge.

Ordering Guide

Feature	Description	Code			
Hardware Configuration		EE07-			
	Model	RH + T	M1		
		T		M3	
	Enclosure material	PC (Polycarbonate)	No code		No code
		Stainless steel		HS2	HS2
	Filter	Membrane, polycarbonate body	F2		F2
		Metal grid, polycarbonate body	F3		
		PTFE (Polytetrafluoroethylene)	F5		
		Stainless steel - metal grid (up to 180 °C / 356 °F)		F9	
		Catalytic for H ₂ O ₂ sterilisation	F12	F12	
	Sensing element protection	Without	No code		
		E+E proprietary coating	C1		
	Additional function	Without	No code		
		Energy saving	AF4		

Order Examples

EE07-M1F2C1

Feature	Code	Description
Model	M1	RH + T
Enclosure material	No code	PC (Polycarbonate)
Filter	F2	Membrane, polycarbonate body
Sensing element protection	C1	E+E proprietary coating
Additional function	No code	Without

EE07-M1HS2F12C1AF4

Feature	Code	Description
Model	M1	RH + T
Enclosure material	HS2	Stainless steel
Filter	F12	Catalytic for H ₂ O ₂ sterilisation
Sensing element protection	C1	E+E proprietary coating
Additional function	AF4	Energy saving

Scope of Supply

- EE07 probe according to ordering guide
- Inspection certificate according to DIN EN 10204-3.1

Accessories

For further information see datasheet [Accessories](#).

Description	Code
M12x1 flange coupling with 50 mm (2") free cable ends	HA010705
Connection cable M12x1 socket 5 poles / free cable ends	HA010819 1.5 m (4.9 ft) HA010820 5 m (16.4 ft) HA010821 10 m (32.8 ft)
Radiation shield with fixed clamping ring (M20x1.5)	HA010502
Protection cap for M12 socket	HA010781
Protection cap for M12 plug	HA010782
Configuration adapter	See datasheet EE-PCA

